

# Canon CXDI-Pro DR

DIGITAL IMAGING PACKAGE



# Optimize your AMRAD Medical System with Canon DR

Bring the power of Canon CXDI Wireless technology to your AMRAD Medical system. With advanced CsI detectors and intuitive NE software, you get the perfect balance of low-dose safety and high-definition clarity. Improve your workflow, increase your daily patient capacity, and experience the gold standard in digital radiography.

## Canon CXDI-Pro Wireless Detectors

The Canon CXDI-Pro wireless detectors are designed to support the demands of medical imaging departments for cost-effective solutions without compromise.

- CXDI-803C Wireless Detector: 11" x 14" (4.6 lb. with battery)
- CXDI-703C Wireless Detector: 14" x 17" (6.4 lb. with battery)
- CXDI-403C Wireless Detector: 17" x 17" (7.7 lb. with battery)

## Battery Charger

- Charge up to two batteries at the same time
- Indicator lights show charging status (25%, 50%, 75%, 100% charged)
- Automatically stops charge when full battery capacity is reached

## AED Function

These DR (Digital Radiography) detectors are equipped with AED (Automatic Exposure Detection) functionality. In this mode, the start of radiation is automatically detected by the sensor panel at exposure time.

## Protection

Contact with fluids is inevitable, particularly in emergency and high-dependency care. The IP55 protection against liquid and dust entering the FPD provides you with extra assurance in the product, while it is in use under challenging conditions, or when cleaning the product for safety.

## Easy Handling & Cleaning

The sleek detector design includes an ergonomic handgrip (6.8mm depth\*) that is sculpted into the lightweight detector making it comfortable to hold and easy to grip. Smooth rounded corners make it easy for the technologist to position and comfortable for the patient.

*\*CXDI-703CW and 403CW detectors only*



## Optional Tethered Operation

The tethered option provides quick and reliable operation when mounted in your system's detector tray, charges the panel's battery and allows the wireless panel to operate without having to be removed from its enclosure.




# CXDI Control Software NE

Canon CXDI Control Software NE is the dedicated platform required to power Canon CXDI Wireless Detectors. By leveraging advanced image processing algorithms, it streamlines clinical workflows and reduces manual steps, ensuring superior image quality with every exam.

- Windows® 11 OS Supported
- Interactive GUI for intuitive operation
- Integrating the Healthcare Enterprise (IHE) compliant
- Ability to rotate images
- Authentication of users and connections
- Flexible DICOM configuration for worklist and export of images and reports
- Cybersecurity provisions including IHE ATNA (secure DICOM and audit trail)
- Flexible dose reporting using Radiation Dose Structured Report, MPPS, and exposure logs

## Advanced Image Processing

- Image stitching function for up to four images which utilizes Canon photographic technology and pixel-to-pixel matching
- Advanced Edge Enhancement improves visualization of tubes, catheters and bone details. The software has three different image processing algorithms (small structures, bone detail and catheter setting)

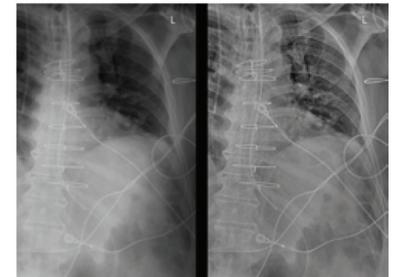

Advanced Edge Enhancement

## Optional Scatter Correction

- Achieve excellent image contrast of any body region without a grid
- Reduce detector handling weight
- Eliminate grid misalignments and artifacts
- Dose reduction
- Consistent image quality



Image without Scatter Correction feature



Image with Scatter Correction feature and without grid

CXDI-Pro Wireless Digital Radiography Systems Specifications <sup>1</sup>			
Model Name	<b>CXDI-803C Wireless</b>	<b>CXDI-703C Wireless</b>	<b>CXDI-403C Wireless</b>
Purpose	General Radiography		
Method	Flat panel detector: scintillator & amorphous silicon (a-Si)		
Scintillator	Cesium Iodide		
Weight (incl. Battery)	4.6 lb (2.1 kg)	6.4 lb (2.9 kg)	7.7 lb (3.5 kg)
Effective Imaging Area	11 x 14 in (273 x 349 mm)	14 x 17 in (349 x 426 mm)	17 x 17 in (426 x 426 mm)
External Dimensions	12 x 15 x .6 in (307.5 x 384 x 15 mm)	15 x 18 x .6 in (384 x 460 x 15 mm)	18 x 18 x .6 in (460 x 460 x 15 mm)
Image Matrix Size	1952 x 2496 pixels	2496 x 3040 pixels	3040 x 3040 pixels
Pixel Size	140 um		
Limiting Resolution	3.5 lp/mm		
Grayscale	A/D: 16 bit		
DQE	Typical 65% (0 lp/mm), 58% (0.5 lp/mm) <sup>2</sup>		
MTF	Typical 65% (0 lp/mm), 58% (0.5 lp/mm) <sup>2</sup>		
Time for ready	< 4 seconds <sup>3</sup>		
Preview Image Time	1 second <sup>3</sup>		
Cycle Time	< 4 seconds <sup>3</sup>		
Dust, Water -Resistance Rating	IP55 (For dust protection against limited dust ingress and water protection against low pressure water jets from any direction) <sup>6</sup>		
Battery Performance	>1,500 images @ 7 second cycle, >140 images @ 100 second cycle		
Charging Performance	Battery charging time approx. 150 min. <sup>5</sup>		
Wireless Standard	IEEE802.11ac		
Wireless Channel/Band	2.4 GHz, 5 GHz		



**With Quick Ready, these detectors are ready to go in as little as 4 seconds**

<sup>1</sup> Specifications subject to change

<sup>2</sup> 0 lp/mm is extrapolated value IEC62220-1-1 2015 (RQA5)

<sup>3</sup> Depending on acquisition mode

<sup>4</sup> Based on tests conducted by an independent institution. Certification does not guarantee against failure or damage.

<sup>5</sup> At an ambient temperature of 77°F. Detector stand is sold separately.



**SUMMIT INDUSTRIES**  
**A NETWORK OF SERVICE & SUPPORT**

Summit Industries' successful service network surrounds you with a dynamic team of exceptional experts. Your organization and your patients will benefit from the experience and best practices that only Summit Industries and their Authorized Dealer Network can offer.



**SUMMIT INDUSTRIES, LLC**  
7555 N. Caldwell Avenue, Niles, Illinois 60714  
(p) 773-353-4000 | (p) 1-800-729-9729



LITR075-0226

www.amradmedical.com